



OFF GRID HYBRID INVERTER

CO Series 6.2KW PV60-500Vdc

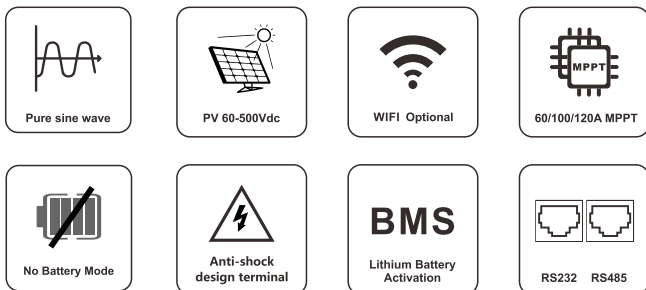

Features

- Lithium battery activation function by PV or Utility
- Compatible work with lifepo4 battery via Rs485
- Pure sine wave
- Power factor 1.0
- PVinput Voltage 60Vdc-500Vdc
- Built-in MPPT60A/100A/120A
- Capable to work without battery
- Detachable dust cover for harsh environment
- WIFI remote monitoring optional
- Support multiple output priority: UTL, SOL, SBU, SUB
- EQ function to optimize battery performance and extend lifecycle

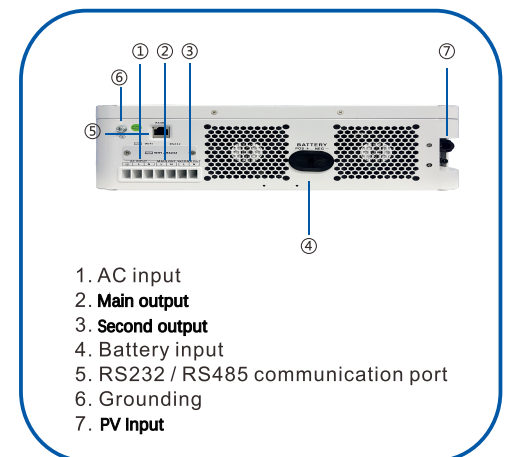

Technical Data

MODEL	CO-EM6.2
Capacity	6.2KVA/6.2KW
Parallel Capability	No
Lithium battery activation	YES(By PV or Utility)
Lithium battery Communication	YES(RS485)
INPUT	
Nominal Voltage	230VAC
Acceptable Voltage Range	170-280VAC(For personal Computer);90-280vac(For Home Appliances)
Frequency	50/60 Hz(Auto sensing)
OUTPUT	
Nominal Voltage	220/230VAC±5%
Surge Power	12400VA
Frequency	50/60Hz
Waveform	Pure Sine wave
Transfer Time	10ms(For personal Computer);20ms(For Home Appliances)
Peak Efficiency	94%
Overload Protection	5s@ >= 140% load; 10s@110%~140% load
Crest Factor	3:1
Admissible Power Factor	0.6~1 (inductive or capacitive)
BATTERY	
Battery Voltage	48VDC
Floating Charge Voltage	54VDC
OverCharge Protection	63VDC
Charging Method	CC / CV
SOLAR CHARGER & AC CHARGER	
Solar Charger Type	MPPT
Max.PV Array Power	6500W
Max.PV Array Open Circuit Voltage	500VDC
PV Array MPPT Voltage Range	60VDC~500VDC
Max.Solar Input Current	27A
Max.Solar Charge Current	120A
Max.AC Charge Current	80A
Max.Charge Current	120A
PHYSICAL	
Dimensions,D x W x H(mm)	450*300*130
Package Dimensions,D x W x H(mm)	572*428*214
Net Weight(Kg)	12
Communication Interface	RS232 / RS485
ENVIRONMENT	
Operating Temperature Range	(-10°C to 50°C)
Storage Temperature	(-15°C ~ 50°C)
Humidity	5% to 95% Relative Humidity (Non-condensing)

*Product specifications are subject to change without further notice.